

**ALFA ECO DOWNLIGHT WARM DIM 8W**

220-240V~50/60Hz LED 8W 180mA IP44








Downlighten kan dimmes ned helt flimmerfritt.  
Lav høyde. Ekstern driver med hurtigkobling for raskere og enklere installasjon. Dimbar med faseavsnitt dimmer. Kan monteres direkte i isolasjonsmatter. Enkel innstallering. Monteres uten verktøy.


The downlight is dimmable all the way down completely flicker-free.  
Low altitude. External driver with quick connector for faster and easier installation. Dimmable with trailing edge dimmer. Can be mounted direct into insulation sheet. Easy installation. Mounting without tools.

Total Effekt: 8W  
LED effekt: 6W  
Lumen chip: 600lm  
Lumen downlight: 520lm  
Ra: 98  
SDCM: ≤3  
LED Chip: Bridgelux  
Fargetemperatur: 2800-2000K (med dimming)  
Lysspredning: 38° Tilt: 30°  
Tetthetsgrad: IP44  
Levetid: 50.000 timer L90


Total Power: 8W  
LED power: 6W  
Lumen chip: 600lm  
Lumen downlight: 520lm  
Ra: 98  
SDCM: ≤3  
LED Chip: Bridgelux  
Colour Temperature: 2800-2000K(with dimming)  
Beam Angle: 38° Tilt: 30°  
IP Rating: IP44  
Lifetime: 50,000 hours L90

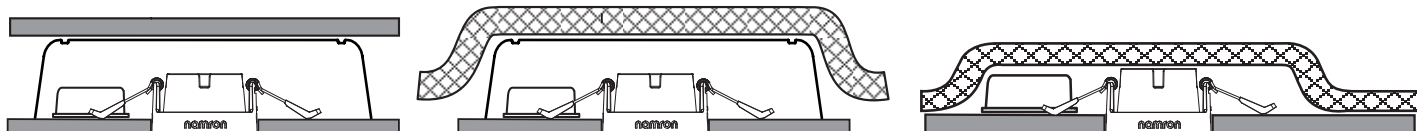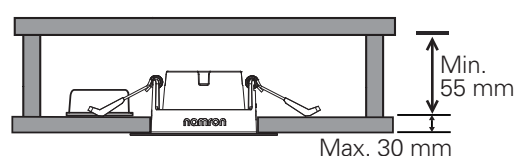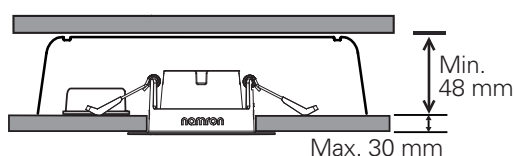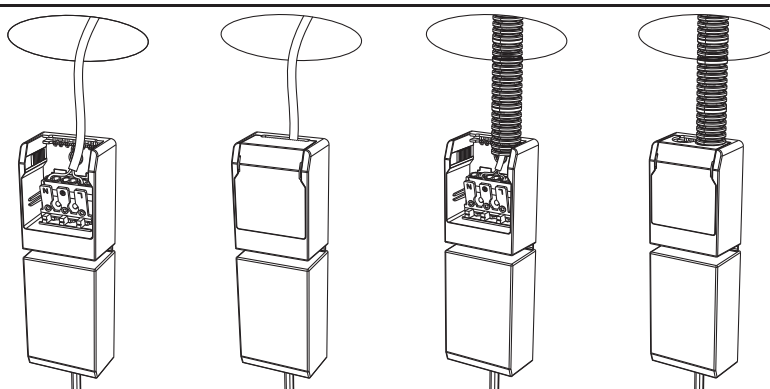

MÅL / MEASURES

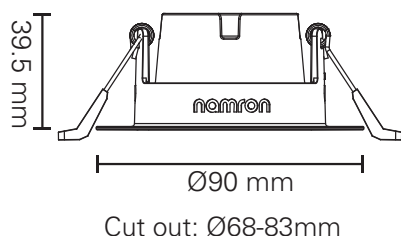

Minimumsavstand til brennbart materiale i armaturens stråleretning. /  
Minimum distance to flammable material in the beam direction



Må installeres av registrert elektroforetak.  
Must be installed by registered electrical company.

Dette produktet inneholder en lyskilde i energieffektivitetsklasse: se tabell eller merkelapp.  
This product contains a light source of energy efficiency class: see table or label.

El-nr	Produkt	Effekt(W)	energieffektivitetsklasse forlys
3220202	Alfa Eco Downlight Warmdim 8W matt hvit	8	F
3220203	Alfa Eco Downlight Warmdim 8W matt sort	8	F