

BRUKSANVISNING INSTRUCTION MANUAL





J&EL

ALUNA DOWNLIGHT WARMDIM 8W


220-240V~50/60Hz LED 6,3W 240mA




Total Effekt:	8W	Total Power:	8W
LED effekt:	6,3W	LED Power:	6.3W
Lysstyrke:	605lm	Lumen:	605lm
CRI:	95	CRI:	95
SDCM:	≤3	SDCM:	≤3
LED Chip:	Bridgelux	LED Chip:	Bridgelux
Kelvin:	1800-3000K	Kelvin:	1800-3000K
Lysspredning:	40°	Beam Angle:	40°
Utsparing:	Ø82-84mm	Cutout:	Ø82-84mm
Tetthetsgrad:	IP65	IP Rating:	IP65
Levetid:	50.000timer L80	Lifetime:	50,000 hours L80

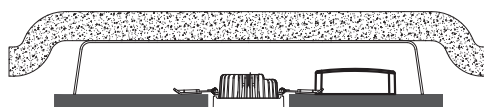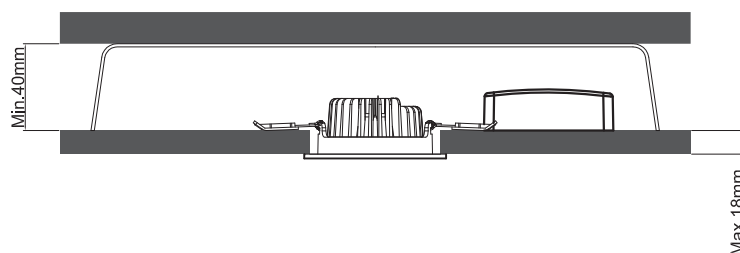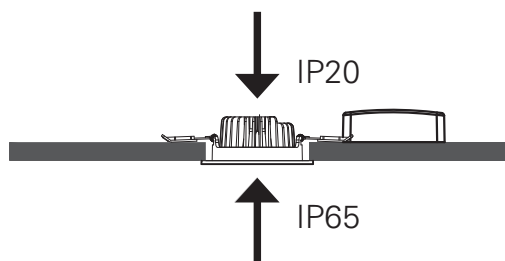

MÅL / MEASURES

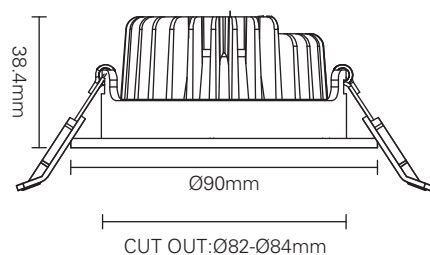

Minimumsavstand til brennbart materiale i armaturens stråleretning. /
Minimum distance to flammable material in the beam direction.



NO: Må installeres av autorisert el-installatør.
EN: Installation must be performed by a qualified electrician.

Dette produktet inneholder en lyskilde i energieffektivitetsklasse: F
This product contains a light source of energy efficiency class: F