

ALFA REFLEKTOR PRO

220-240V~50/60Hz LED 10W 220mA IP44










Downlighten kan dimmes ned helt flimmerfritt.
Lav høyde. Ekstern driver med hurtigkobling for raskere og enklere installasjon. Dimbar med faseavsnitt dimmer.
Kan monteres direkte i isolasjonsmatter.
Enkel installering. Monteres uten verktøy.


The downlight is dimmable all the way down completely flicker-free.
Low altitude. External driver with quick connector for faster and easier installation. Dimmable with trailing edge dimmer.
Can be mounted direct into insulation sheet.
Easy installation. Mounting without tools.

| | |
|-------------------|----------------------|
| Total effekt: | 10W |
| LED effekt: | 8W |
| Lumen chip: | 845lm |
| Lumen downlight: | 760lm |
| Effektivitet: | 76lm/W |
| Ra: | 98 |
| R9: | ≥90 |
| SDCM: | ≤3 |
| LED Chip: | LUMINUS |
| Fargetemperatur: | 2700K |
| Lysspredning: 35° | Tilt: 30° |
| Tetthetsgrad: | IP44 |
| Levetid: | 50.000 timer L90B10 |
| | 80.000 timer L80B50 |
| | 120.000 timer L70B50 |


| | |
|---------------------|----------------------|
| Total power: | 10W |
| LED power: | 8W |
| Lumen chip: | 845lm |
| Lumen downlight: | 760lm |
| Efficacy: | 76lm/W |
| Ra: | 98 |
| R9: | ≥90 |
| SDCM: | ≤3 |
| LED Chip: | LUMINUS |
| Colour Temperature: | 2700K |
| Beam Angle: 35° | Tilt: 30° |
| IP Rating: | IP44 |
| Lifetime: | 50,000 hours L90B10 |
| | 80,000 hours L80B50 |
| | 120,000 hours L70B50 |

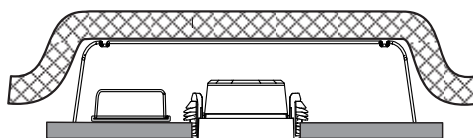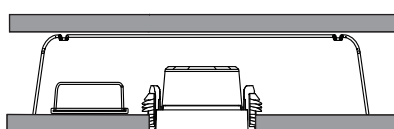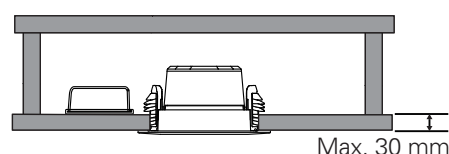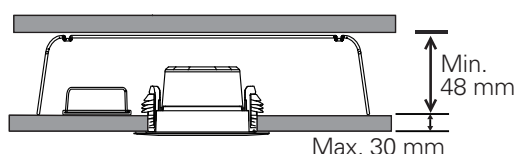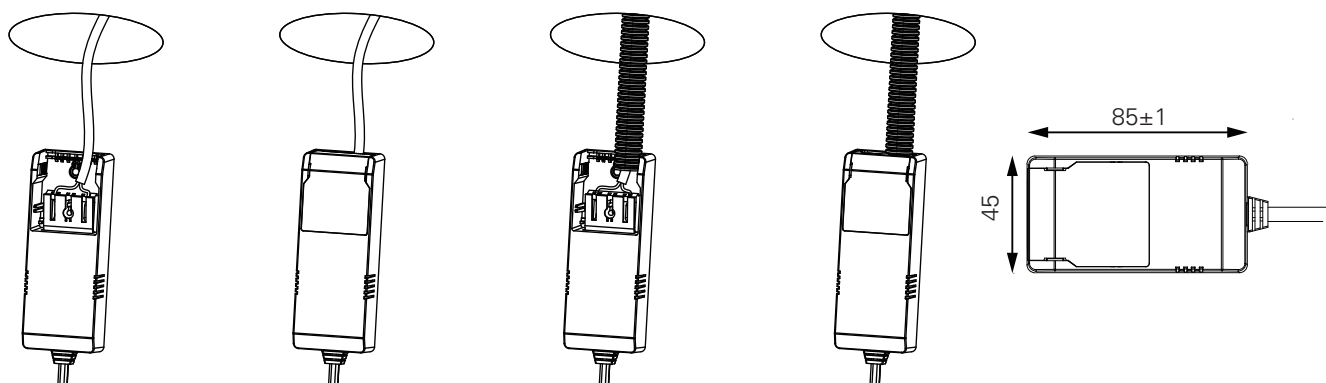

MÅL / MEASURES

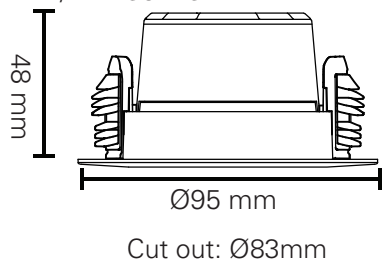

Minimumsavstand til brennbart materiale i armaturens stråleretning. /
Minimum distance to flammable material in the beam direction



Må installeres av registrert elektroforetak.
Must be installed by registered electrical company.

Dette produktet inneholder en lyskilde i energieffektivitetsklasse: se tabell eller merkelapp.
This product contains a light source of energy efficiency class: see table or label.

| El-nr | Produkt | Effekt(W) | Energieffektivitetsklasse for lys |
|---------|----------------------------------|-----------|-----------------------------------|
| 3220293 | ALFA REFLEKTOR PRO 10W MATT HVIT | 10 | F |
| 3220294 | ALFA REFLEKTOR PRO 10W MATT SORT | 10 | F |

Max. luminaires per circuit breaker:

| Type B | | | Type C | | |
|--------|-----|-----|--------|-----|-----|
| 10A | 16A | 20A | 10A | 16A | 20A |
| 115 | 184 | 230 | 127 | 204 | 255 |