

BRUKSANVISNING INSTRUCTION MANUAL

namron

SKAPBELYSNING 3W



220-240V~50/60Hz LED 3W IP44





LED effekt: 3W
Lumen chip: 330lm
Lumen downlight: 300lm
Ra: 98
SDCM: ≤ 3
LED Chip: CREE
Fargetemperatur: 2700K
Lysspredning: 38°
Utsparing: $\varnothing 56-58$ mm
Levetid: 50.000 timer L90

LED power: 3W
Lumen chip: 330lm
Lumen downlight: 300lm
Ra: 98
SDCM: ≤ 3
LED Chip: CREE
Colour Temperature: 2700K
Beam Angle: 38°
Cut out $\varnothing 56-58$ mm
Lifetime: 50,000 hours L90

MONTERING / MOUNTING

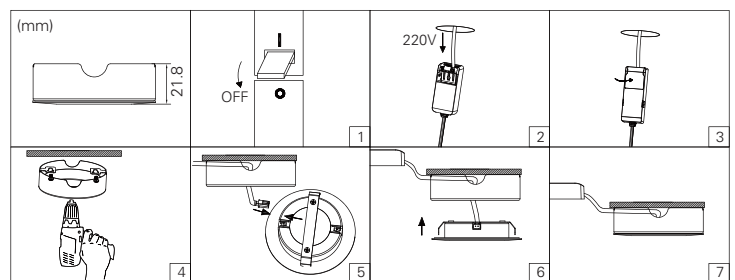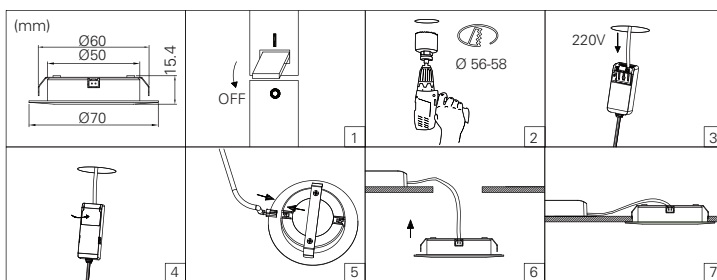

KOBLING / WIRING

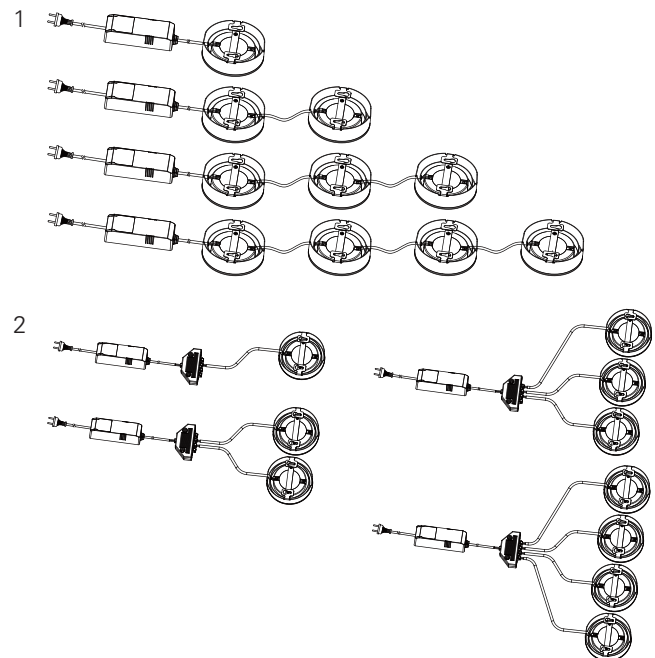
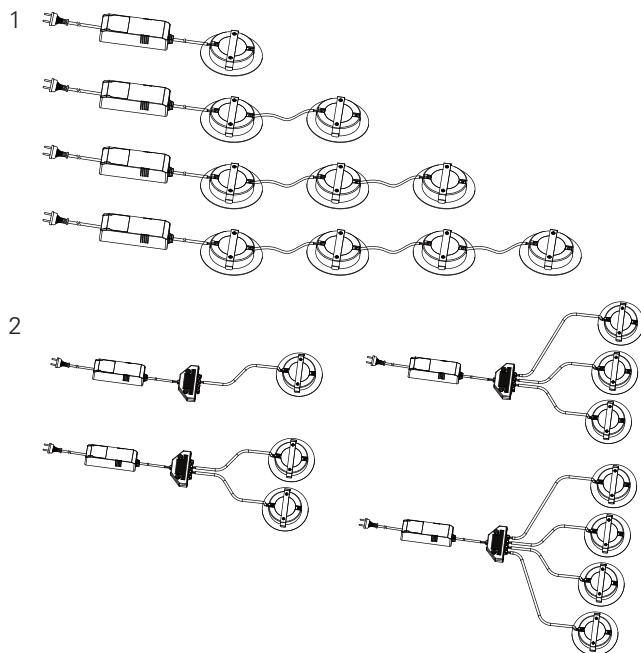


EFFEKT/POWER


1stk LED + 1stk driver = 4,8W (3W LED + 1,8W driver)
2stk LED + 1stk driver = 9,5W (6W LED + 3,5W driver)
3stk LED + 1stk driver = 13,5W (9W LED + 4,5W driver)
4stk LED + 1stk driver = 17W (12W LED + 5W driver)

1pcs LED + 1pcs driver = 4,8W (3W LED + 1,8W driver)
2pcs LED + 1pcs driver = 9,5W (6W LED + 3,5W driver)
3pcs LED + 1pcs driver = 13,5W (9W LED + 4,5W driver)
4pcs LED + 1pcs driver = 17W (12W LED + 5W driver)

MÅL / MEASURES



Minimumsavstand til brennbart materiale i armaturens stråleretning. /
Minimum distance to flammable material in the beam direction



Må installeres av registrert elektroforetak.
Must be installed by registered electrical company.

Dette produktet inneholder en lyskilde i energieffektivitetsklasse: se tabell eller merkelapp.
This product contains a light source of energy efficiency class: see table or label.

El-nr	Produkt	Effekt(W)	energieffektivitetsklasse for lys
3222207	NAMRON SKAPBELYSNING LED SPOT 3W IP44 MATT HVIT	3W	G
3222261	NAMRON SKAPBELYSNING LED SPOT 3W IP44 MATT SORT	3W	G