


Moon Pro 255S, 320S & 420S


hidealite

E-nr	Snro	El.nr	GTIN	Name	LED color	Color	Unit effect
75 028 71	42 895 80	32 269 52	7392971129853	Moon Pro 255S	3000K	White	11W
75 028 73	42 895 82	32 269 54	7392971129877	Moon Pro 320S	3000K	White	14W
75 028 75	42 895 84	32 269 56	7392971129891	Moon Pro 420S	3000K	White	19.5W


MOON PRO 255S

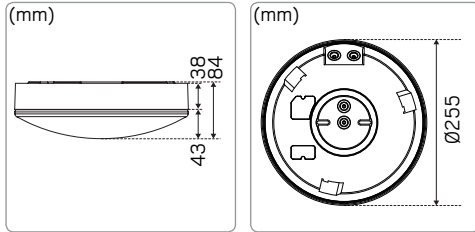

MOON PRO 320S

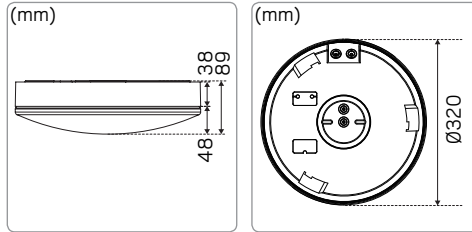


MOON PRO 420S

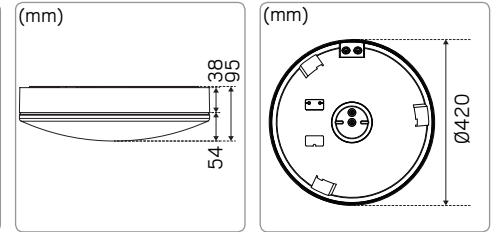


SAFETY INSTRUCTIONS

- en** Read these instructions carefully before commencing installation and retain for future reference. The luminaire should be installed by a licensed electrician and in accordance with local regulations. Make sure that the power is off before installation or maintenance.
- sv** Läs dessa instruktioner före installationen påbörjas och lämna den vidare till brukaren av anläggningen. Armaturen skall installeras av behörig installatör och enligt gällande föreskrifter. Se till att spänningen är frånslagen före installation eller underhåll.
- fi** Lue nämä ohjeet ennen asentamista ja luovuta ohjeet valaisimen seuraavalle käyttäjälle. Valaisimen saa asentaa valtuutettu asentaja voimassa olevien määräysten mukaisesti. Varmista, että jännite on kytketty päältä ennen asennusta ja huoltoa.
- no** Les disse instruksjonene før du starter installeringen, og gi den deretter videre til anleggets bruker. Armaturen skal installeres av en godkjent installatør og i henhold til gjeldende lover og regler. Sørg for at strømmen er koblet fra før installering og ved vedlikehold.
- da** Læs denne vejledning omhyggeligt, før installationen udføres og gem den til fremtidig brug. Armaturet skal installeres af en autoriseret installatør i henhold til gældende love og regler. Sørg strømmen er afbrudt før installation og vedligeholdelse.

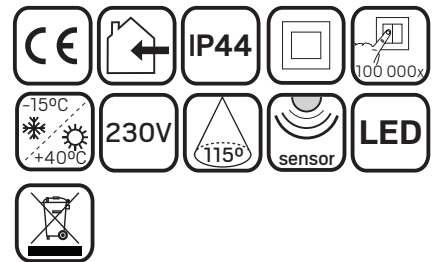


For explanation of symbols see www.hidealite.se


Installation

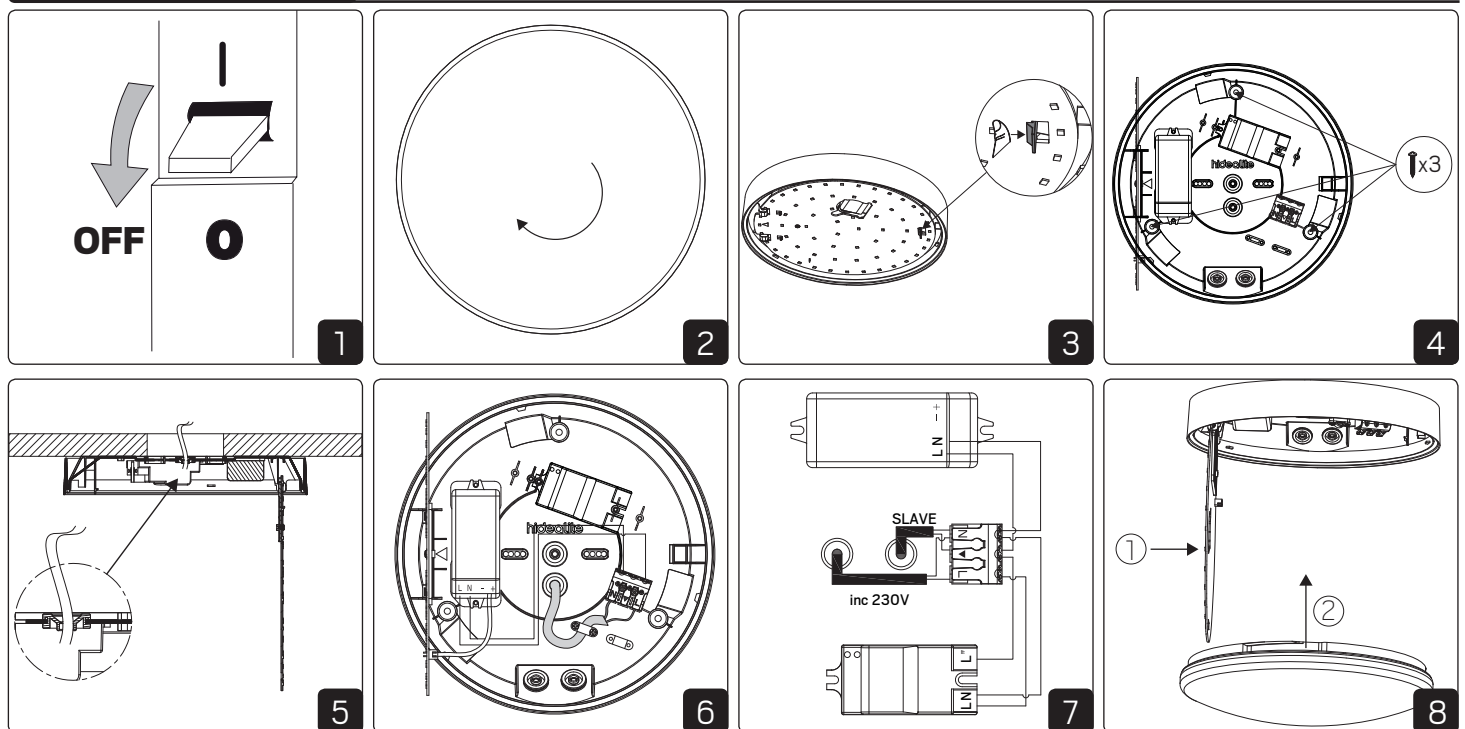


Function motion sensor

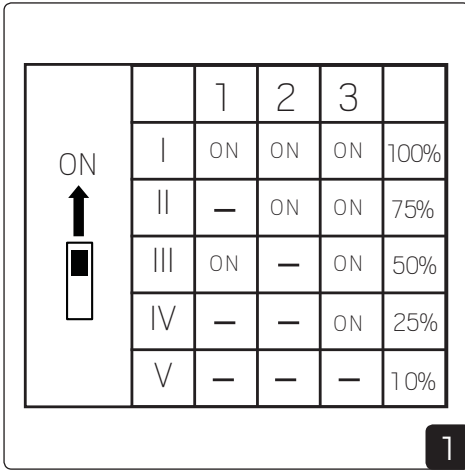

1

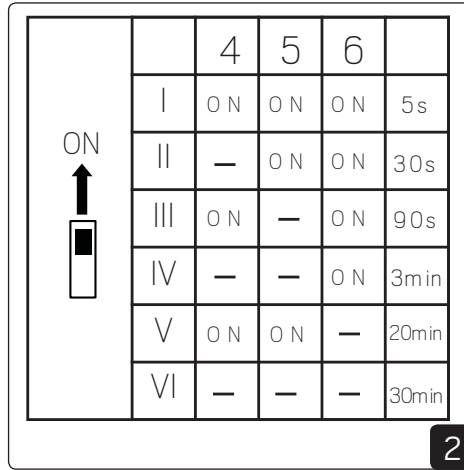

2

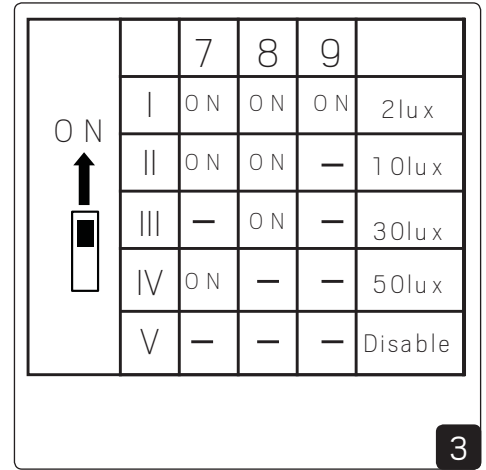



3

Range - The range is the area the sensor covers. The units lights when motion is sensed in the area. Set the DIP switch as follows to adjust the sensor's range.

Hold Time - A delay time concerns the time the unit remains lit after the person leaves the sensor's range. Set the DIP switch as follows to adjust the sensor's hold time.

Daylight sensor - Set the daylight sensor as per the DIP switch for different activation values. The unit functions as per the settings below:

- Disable: Sensor always active, even in daylight.
- 50Lux: Sensor active from slight light reduction.
- 30Lux: Sensor active from half dark.
- 10Lux: Sensor active from almost dark.
- 2Lux: Sensor active from totally dark.

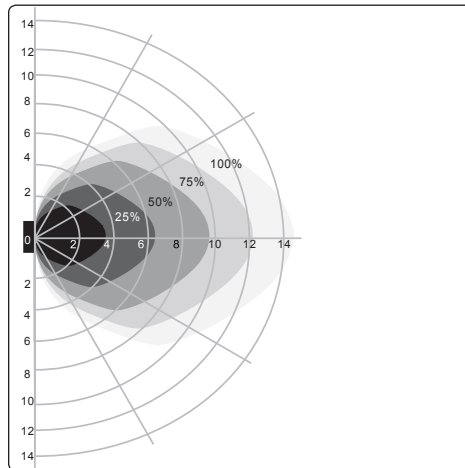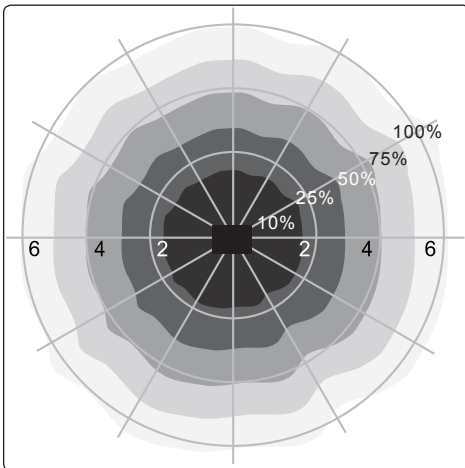


Range - Ceiling mounting pattern (Unit: m)
Suggested installation height: 2.5-6m

Range - Wall mounting pattern (Unit: m)
Suggested installation height: 1-1.8m



With insufficient ambient light, the sensor switches on the lamp when motion is detected.

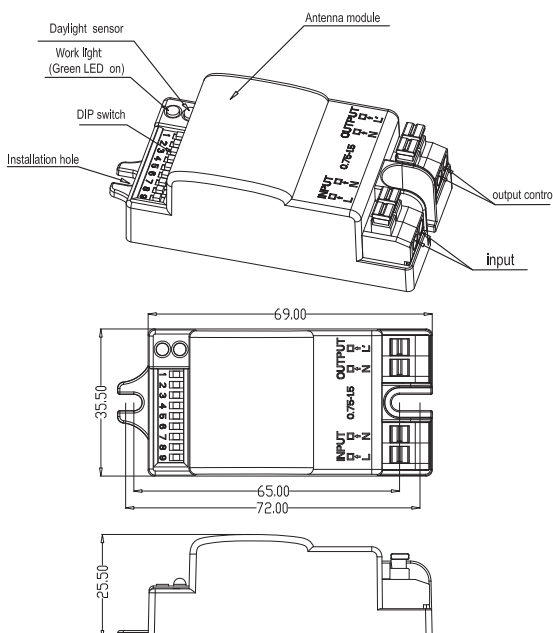

MC030S

Operating voltage	220~240Vac, 50Hz
Rated load	400W(inductive), 800W (resistive)
HF system	5.8GHz±75MHz, ISM wave band
Transmitting power	<0.5mW
Power consumption	≤0.5W(standby)
Detection zone	Max.(D x H): 12m x 6m
Detection sensitivity	10% / 25% / 50% / 75% / 100%
Hold time	5s / 30s / 90s / 3min / 20min / 30min
Daylight sensor	2lux / 10lux / 25lux / 50lux / Disable
Mounting height	6m Max.
Motion detection	0.5~3m/s
Detection angle	150°(wall installation) 360°(ceiling installation)
Operating temperature	-35℃ ~70℃
IP rating	IP20