

BRUKSANVISNING INSTRUCTION MANUAL SKINNESPOT 3-FAS

namron




100-240VAC 50/60Hz IP20






Total Effekt: 40W
 LED effekt: 37W
 Lumen chip: 3980lm
 Lumen downlight: 3500lm
 CRI: 95
 SDCM: ≤3
 LED Chip: Luminus
 Fargetemperatur: 4000K
 Lysspredning: 24°
 Roterbar: 350° Tilt: 90°
 Tetthetsgrad: IP20
 Levetid: 50.000 timer L90

Total Power: 40W
 LED power: 37W
 Lumen chip: 3980lm
 Lumen downlight: 3500lm
 CRI: 95
 SDCM: ≤3
 LED Chip: Luminus
 Colour Temperature: 4000K
 Beam Angle: 24°
 Rotoary: 350° Tilt: 90°
 IP Rating: IP20
 Lifetime: 50,000 hours L90

INSTALLASJON/INSTALLATION

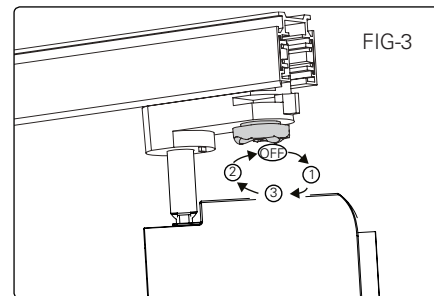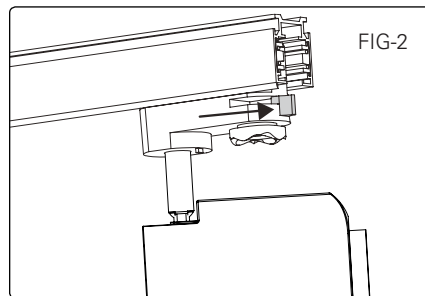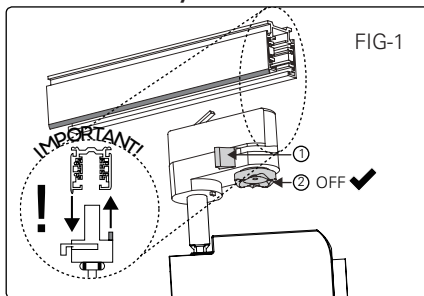


VED DEMONTERING/REMOVAL

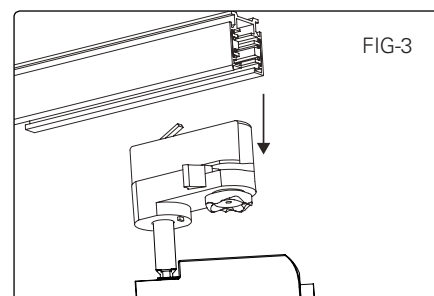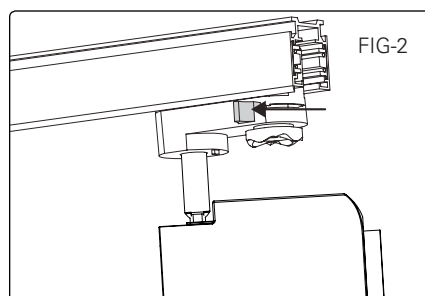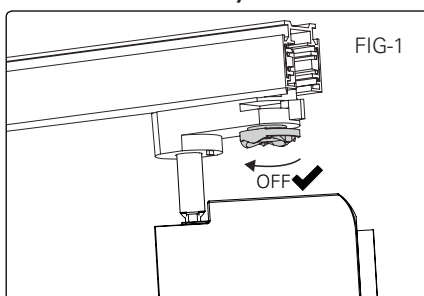


MÅL / MEASURES

PASSER SKINNER FRA/FITS
 Staff
 Norlux
 Global
 Nuco
 Nordic

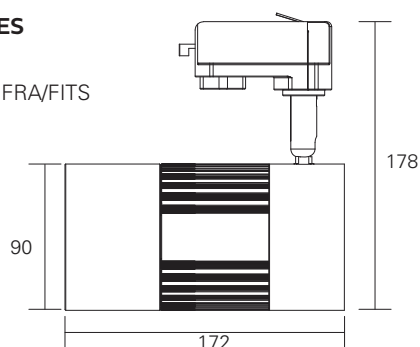

Minimumsavstand til brennbart materiale i armaturens stråleretning. /
 Minimum distance to flammable material in the beam direction



Må installeres av registrert elektroforetak.
 Must be installed by registered electrical company.