


**TAKARMATUR CLOUD LED**

220-240V~ 50/60Hz



Effekt:	18W/30W/40W	Power:	18W/30W/40W
Spenning:	220-240V~ 50/60Hz	Voltage:	220-240V~ 50/60Hz
Lysstyrke:	1800lm/3150lm/4500lm	Lumen:	1800lm/3150lm/4500lm
CRI:	80	CRI:	80
Fargetemperatur:	3000K	Color temperature:	3000K
Lysspredning:	110°	Beam angle:	110°
Levetid:	50.000t L80	Lifetime:	50,000h L80
Dimbar:	Ja	Dimmable:	Yes

**MONTERING / MOUNTING**

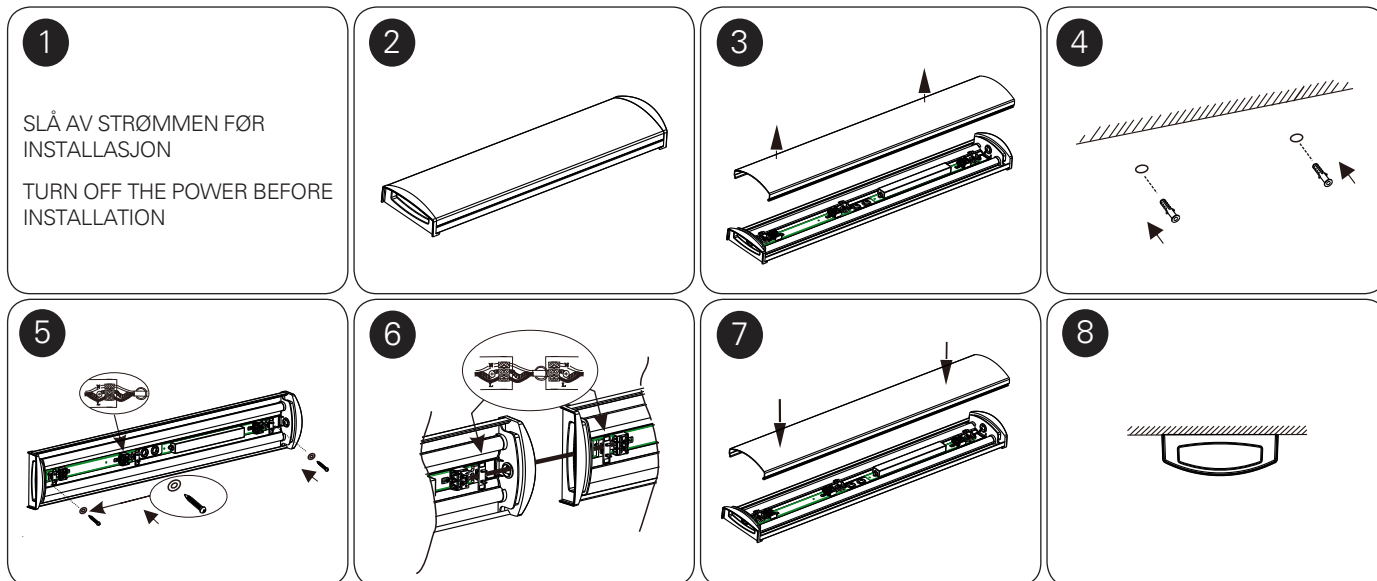


**SYMBOL FOR SPESIAL AVFALL**

- Dette symbolet indikerer at produktet må leveres på spesialavfall. Følgende gjelder:
- Dette produktet er beregnet for spesialavfall og må ikke kastes i husholdningsavfall.
  - For mer informasjon, kontakt de lokale myndigheter med ansvar for avfallshåndtering. Ved å levere disse materialene for gjenvinning, bidrar du til å beskytte miljøet.
  - Lyskilden til denne armaturen er ikke utskiftbar. Når lyskilden slutter å virke, må hele armaturen skiftes ut.

**SYMBOL FOR SEPARATE COLLECTION**

- This symbol indicates that this product is to be collected separately. This following apply:
- This product is designated for separate collection at an appropriate collection point. Do not dispose of as household waste.
  - For more information, contact the local authorities in charge of waste management. By providing these materials for recycling, you contribute substantially to protect the environment.
  - The light source of this luminaire is not replaceable; when the light source reaches its end of life, the whole luminaire shall be replaced.

**MÅL / MEASURES**

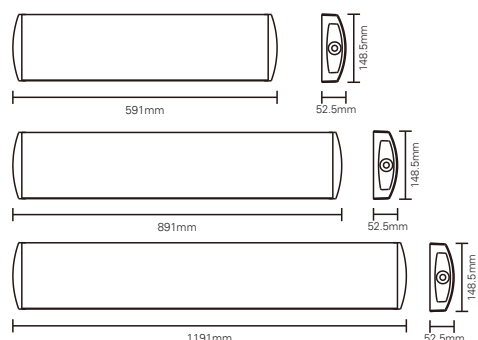

**NO:** Må installeres av autorisert el-installatør.  
**EN:** Installation must be performed by a qualified electrician.