



# DESIGNLIGHT




Artikel nr.: □P-007MW2030 E-nr74 647 48  
Material:Aluminum

**50mA 2000K**


LED	2W	LED Driver 50mA 230V AC	Färg temp. 2000K			60 lm	78cd	25°	
	IP20 IP44		H 36 mm		94mm		35,000		RoHS

● 30 lm/w med lins,driver ● 104 lm/w utan lins,driver ● CRI Värde>80

### Ljusfördelningskurva. Light distribution curve.(Cd)

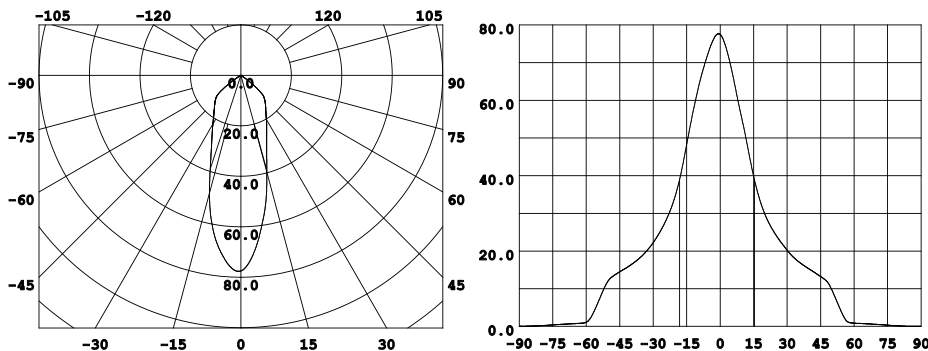

### Belysningsstyrka (Enhet: Lux) Illuminance(Lux)

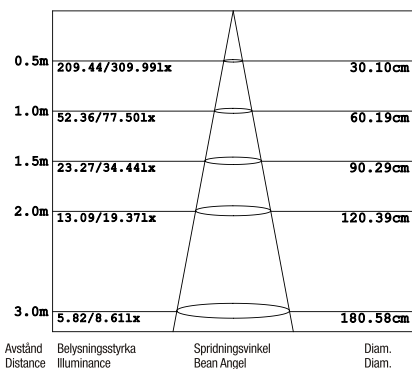


**200mA 2700K**


LED	5.4W	LED Driver 200mA 230V AC	Färg temp. 2700K			325 lm	382cd	25°	
	IP20 IP44		H 36 mm		94mm		35,000		RoHS

● 60 lm/w med lins,driver ● 104 lm/w utan lins,driver ● CRI Värde>80

### Candle Power Distribution Curve(Unit:cd)

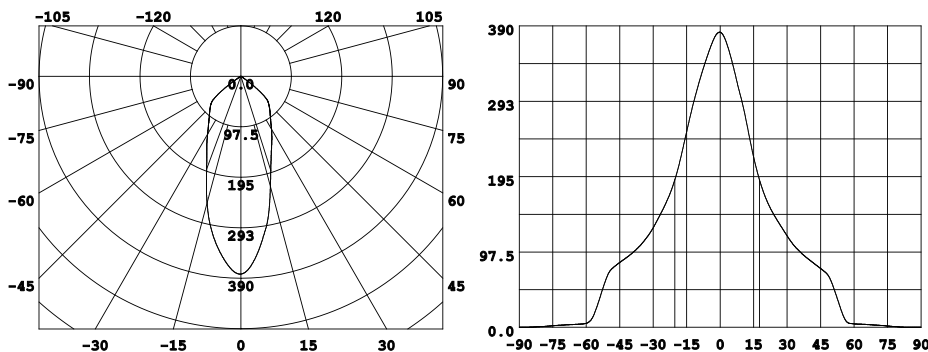

### Average Illuminance(Unit:Lux)

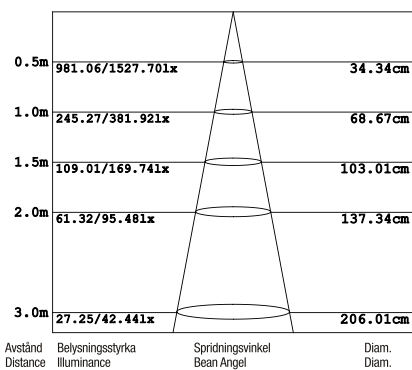


**300mA 3000K**

LED	7W	LED Driver 300mA 230V AC	Färg temp. 3000K			485 lm	560cd	25°	
	IP20 IP44		H 36 mm		94mm		35,000		RoHS

● 69 lm/w med lins,driver ● 104 lm/w utan lins,driver ● CRI Värde>80

### Candle Power Distribution Curve(Unit:cd)

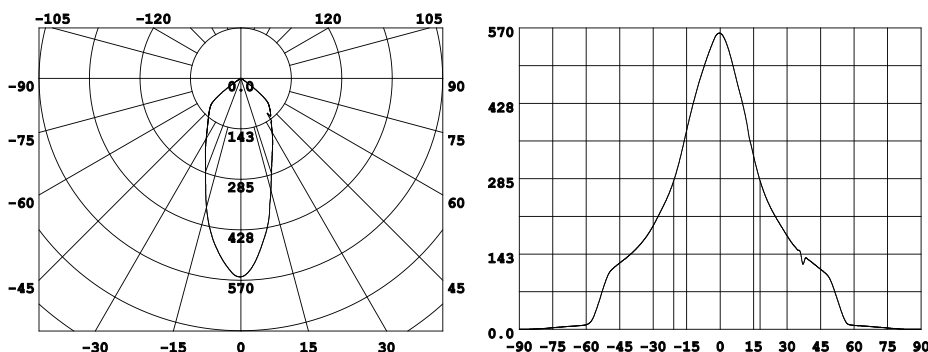

### Average Illuminance(Unit:Lux)

