

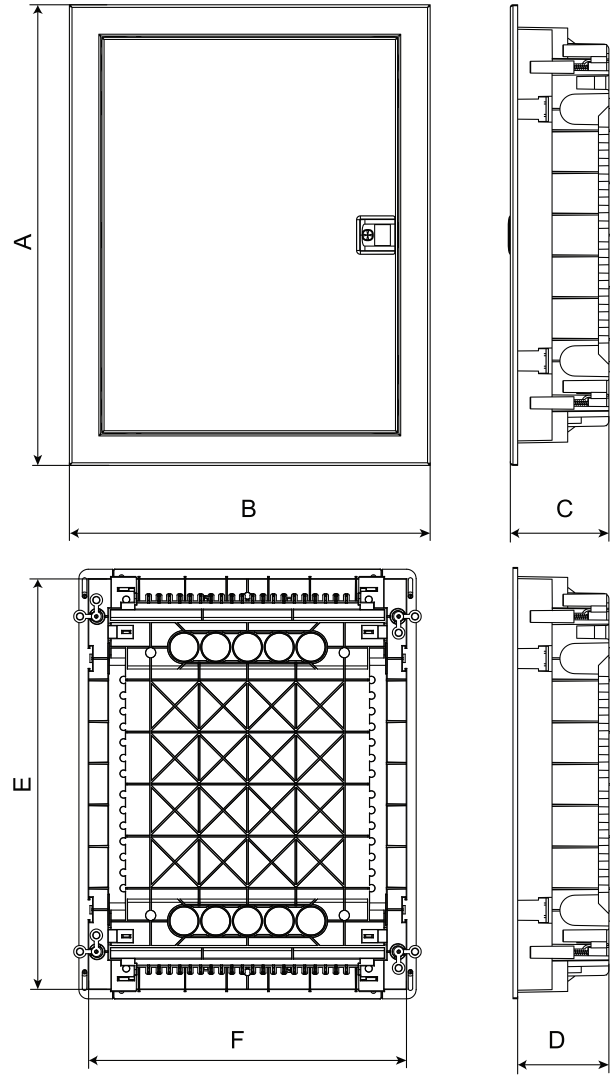


GP

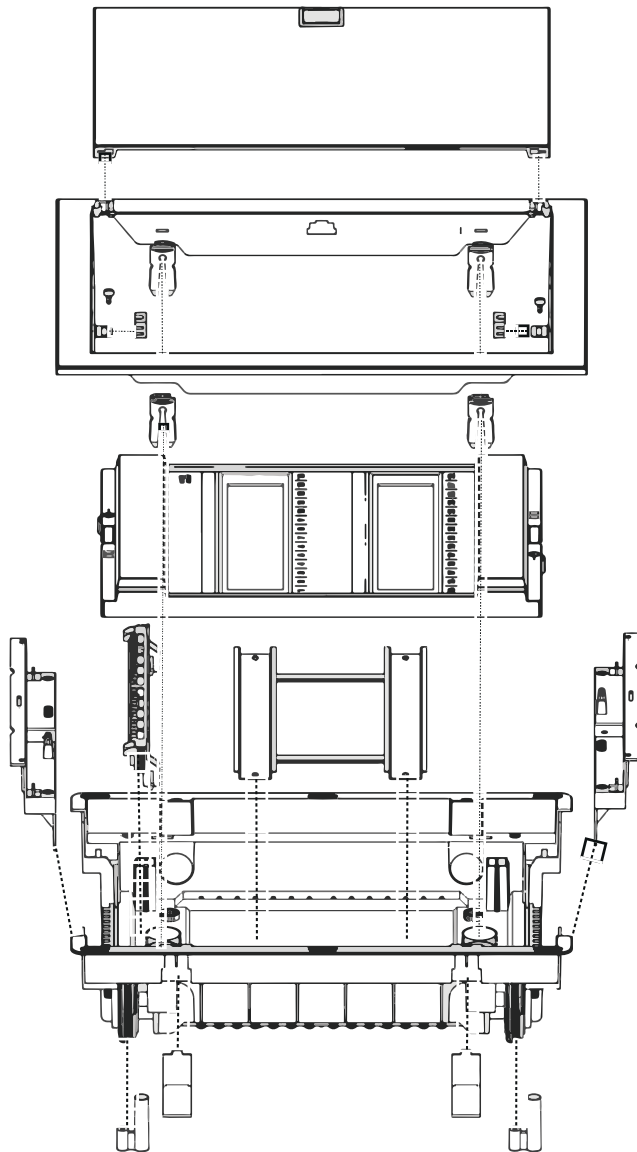

	A	B	C	D	E	F	PDE	Static load
U12E	317 mm	346 mm	92 mm	87 mm	274 mm	306 mm	31 W	1820 g
U24E	442 mm	346 mm	92 mm	87 mm	399 mm	306 mm	40 W	1820 g
U36E	592 mm	346 mm	92 mm	87 mm	549 mm	306 mm	50 W	1820 g
U48E	717 mm	346 mm	92 mm	87 mm	673 mm	306 mm	60 W	1820 g
U60E	842 mm	346 mm	92 mm	87 mm	799 mm	306 mm	70 W	1820 g

For indoor locations (S 50% RH at max. +40°C  
 or for example 90% RH at +20°C)  
 Temperature range: -25°C ... +60 °C.  
 Rating Voltage: AC 400 V; IP40, Class II; IK08  
 According to: IEC 60670; IEC 62208

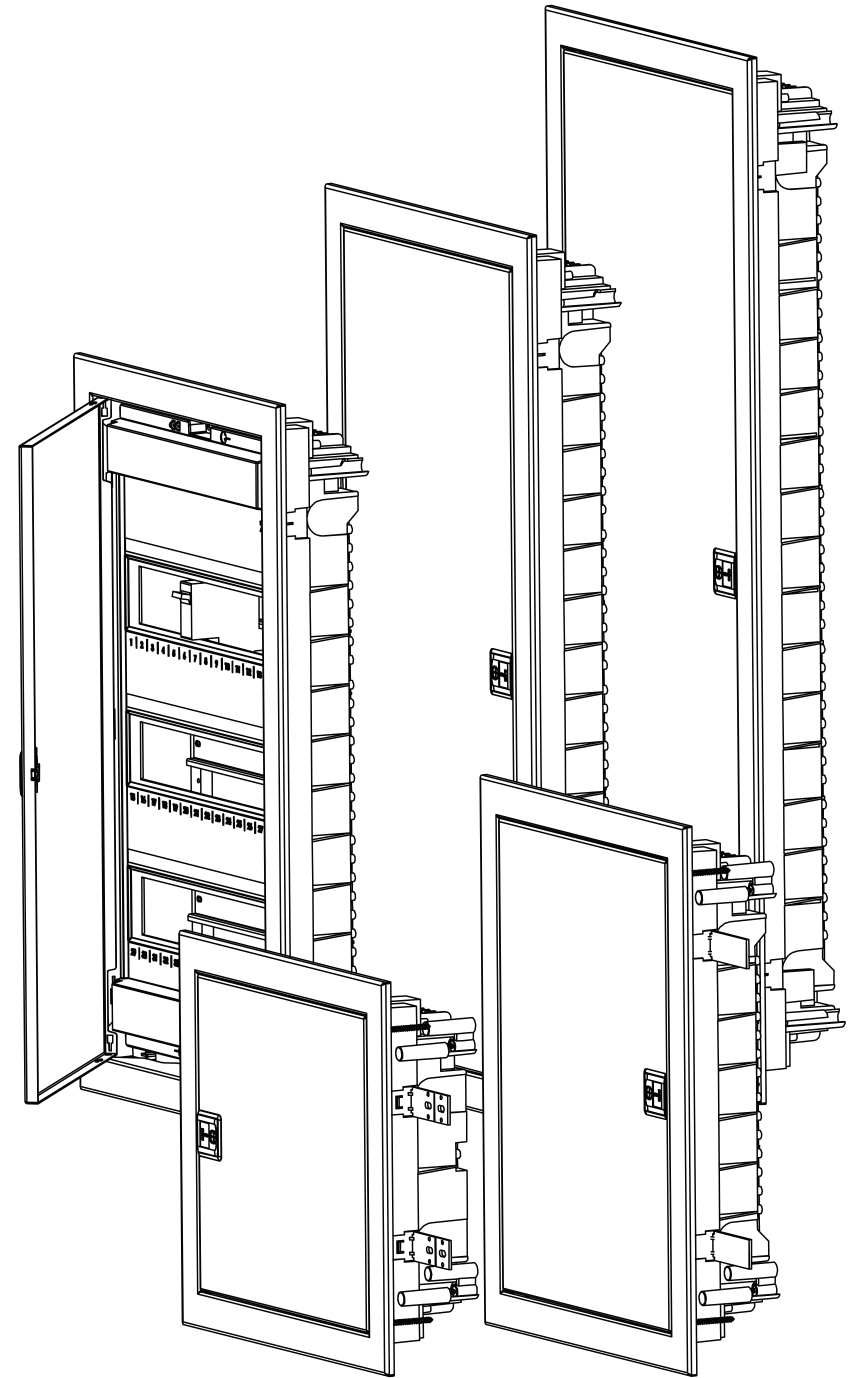

Verktøy

